

FH-CeilingMountTrack™



CS FH-CeilingMountTrack with 1-lite CS NewYorker doors



Corner meeting FramelessGlass



Single track with veneer door



Single track with AluTec door



FH-CeilingMountTrack™


Features

CS FH-CeilingMountTrack is supplied with full-length timber packers, enabling ceiling linings to be fixed flush with the underside of the track. This allows doors to span from floor to ceiling, creating a sense of space and continuation between rooms.

- ▮ Track is high quality, heavy duty extruded aluminium.
- ▮ Maximum door weight: 240kg using M8 (4-wheel) carriages.
- ▮ Fits into typical ceiling batten spaces - total track height is 36mm.
- ▮ Door pick-up system is available where multiple doors are used.
- ▮ 1, 2, 3, 4 or 5 track set-ups available.
- ▮ Available in cut lengths up to 10m long.

Technical Information


Double Track

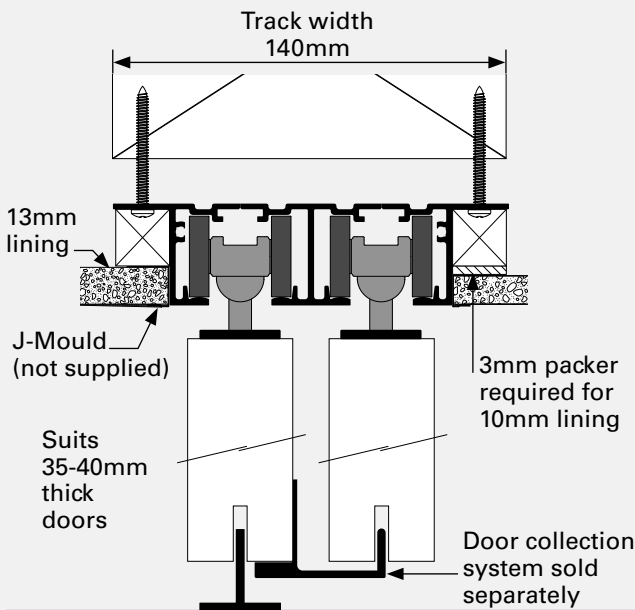

Max Door Thickness	Single: No limit Double/Triple: 40mm
Track Finish:	Mill-finish (Multi), NA (Single); Powder coating may be available upon request†
Max Door Weight:	Standard: 240kg SofStop: 100kg
Brush Seals Available:	No
Carriage Pack:	M6/M8/SofStop

Options

Configurations

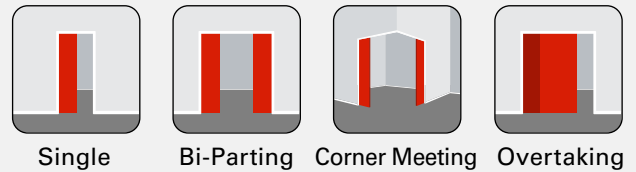

Operation



Track Options



Pack Components

- ▮ Track - cut to specified length
- ▮ All required T-Guides and track stops
- ▮ M6 (120kg), M8 (240kg) or SofStop wheel pack
- ▮ Track fixing screw sets



†Special paint or anodised finishes must be requested at time of order. Additional charges and lead time apply. Drawings are not to scale. All dimensions in mm.

CS Cavity Sliders Pty. Ltd.
T 02 9905 0588
F 02 9905 7088

www.cavitysliders.com.au
info@cavitysliders.com.au

PO Box 158
Freshwater, NSW 2096

CavitySliders™
The Cavity Slider Experts