



Two CS FramelessGlass Single units with frosted glass doors and custom stainless steel handles fitted



Single with etchlight glass



Single with automated door



Single with clear glass



Features

A **CS FramelessGlass** unit uses a glass door leaf instead of a typical wooden door. The glass can provide a clear and unobstructed view through the doorway whether the door is open or closed.

This unit can be supplied in two ways:

1. Clamp bracket (that holds the glass) hidden above head jambs - gives a clean look.
2. Clamp bracket visible below head jambs - access to carriages is easy and clearance is increased between floor and underside of head jambs.

- ▮ Various glass door options available. 10mm or 12mm safety glass must be specified.
- ▮ Designed to fit into standard 90mm wall framing.
- ▮ Maximum door weight: Standard: 240kg SofStop: 100kg.
- ▮ Supplied with wool-pile brush seals fitted to the jambs, which protect and help guide the door.
- ▮ Toughened glass door is very stable even in varying temperatures.

Technical Information

Useful formulas ([online calculator on our website](#))

Dimension Required	Single	Bi-Parting
Trim height*	DH + 95	DH + 95
Trim width*	(DWx2) - 70	(DWx4) - 190
Distance between jambs*	DW - 31	(DWx2) - 42
Distance over jambs (Arch)	DtW + 13	(DWx2) + 6
Distance over jambs (Grvd)	DW + 31	(DWx2) + 20
Floor to top of head (Arch)	DH - 33	DH - 33
Floor to top of head (Grvd)	DH - 22	DH - 22
Floor to underside of head*	DH - 53	DH - 53

All dimensions in millimetres. DH=Door Height, DW=Door Width
* = Same calculations for Architrave (Arch) & Grooved (Grvd) jambs

How to specify (example)


Product:	~ CS FramelessGlass Cavity Slider
Location:	~ Meeting Room
Door leaf dimensions:	~ 2400mm x 910mm
Door type:	~ 10mm toughened glass
Glass finish:	~ Etchlite
Single or Bi-Parting:	~ Single
Jamb type & finish:	~ Grooved (for wall linings)
Framing material & size:	~ 90mm timber framing
Wall lining thickness:	~ 10mm
Door gear type:	~ CS 240kg track system & FramelessGlass clamp
Handle type:	~ 10mm glass D-pull

Full specifications: www.masterspec.co.nz or www.natspec.com.au

Options

Incorporate any of the architectural detail options below with the CS FramelessGlass cavity slider to create a specific look or to provide a unique solution to your design requirements.

Configurations

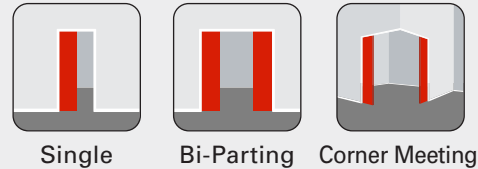

Single

Bi-Parting

Corner Meeting

Jamb Options



Architrave

Grooved

ShadowLine

Custom

Full-Height

NoClosing Jamb

SquareStop

Operation




Standard

SofStop®

Specialised

Ply panels
Door Protrusion
H3 Components

Glazing Options

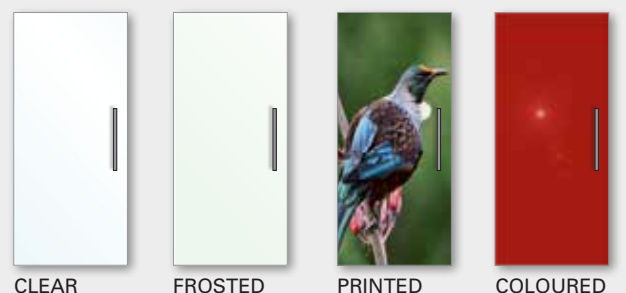

CLEAR

FROSTED

PRINTED

COLOURED