




Oversized CS Ultimate with ActaLink joining system.



Oversized 3m high x 4m wide Single unit with panelled door.



4m high x 3m wide Ultimate.



Features

CS Ultimate is an engineered heavy duty cavity sliding door system to suit 120mm framing. It is designed for thicker, heavier, specialised or custom manufactured door leaves.

The track extrusion has hidden cells with the option of installing steel bars for extra strength and rigidity.

- ▶ Timber jamb finishes can be specified with almost any door up to 68mm thick, including our **CS NewYorker**.
- ▶ More than one timber door can be joined together using the **CS ActaLink** joining system to create one large over-width door.
- ▶ Maximum door weight: 240kg.
- ▶ Tracks may have steel bars inserted for self supporting element where no lintel is present. Max. door weight must not exceed 75kg per metre width of door. Closing jamb must be fitted.

Technical Information

Useful formulas ([online calculator www.cavitysliders.com.au](http://www.cavitysliders.com.au))

Dimension Required	Single	Bi-Parting
Trim height*	DH + 95	DH + 95
Trim width*	(DWx2) + 30	(DWx4) + 10
Distance between jambs*	DW - 31	(DWx2) - 42
Distance over jambs (Arch)	DW + 13	(DWx2) + 6
Distance over jambs (Grvd)	DW + 31	(DWx2) + 20
Floor to top of head (Arch)	DH + 38	DH + 38
Floor to top of head (Grvd)	DH + 49	DH + 49
Floor to underside of head*	DH + 18.5	DH + 18.5

All dimensions in millimetres. DH=Door Height, DW=Door Width
 * = Same calculations for Architrave (Arch) & Grooved (Grvd) jambs

How to specify (example)

Product:	~ CS Ultimate by CS Cavity Sliders
Location:	~ Room divider
Door leaf dimensions:	~ 3000mm x 4000mm
Door type:	~ 55mm joinery door
Door finish:	~ Paint Quality
Single or Bi-Parting:	~ Single
Jamb type & finish:	~ Pine flat (for architraves)
Framing material & size:	~ 120mm timber framing
Wall lining thickness:	~ 10mm
Door gear type:	~ CS 240kg track system
Handle type:	~ CaviLock CL100 Lever

Full specifications are available on www.natspec.com.au

Quality


Our aim is to manufacture the best sliding door systems available. Every component used within our products is uniquely designed with this in mind and backed by our manufacturer's guarantee.

WE GUARANTEE PRODUCT WITH OUR SERIAL CODES FOR UP TO TEN YEARS*

Options

Incorporate any of the architectural detail options below with the CS Ultimate cavity slider to create a specific look or to provide a unique solution to your design requirements.

Configurations

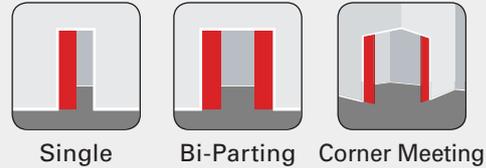

Jamb Options



* Selected door thicknesses

Operation



Standard

Specialised

Ply panels
 Door Protrusion
 H3 Components

Suitable Door Types

Can be specified with almost any choice of door, including our **CS DoorLeaves** range.



Ultimate with custom door