

WallMountTrack™



Oversized surface sliding timber veneer door with anodised pelmet



Anodised track with NewYorker



Anodised track with flush door



Powder coat track with flush door




Features

CS WallMountTrack is suitable for surface sliding applications where there is enough strength in the wall to mount a side-track above the doorway. It can be used almost anywhere a surface sliding door is required.

- Available in cut lengths up to 6m long.
- Track is high-quality, heavy duty extruded aluminium.
- Pelmet may be anodised or powder coated in a range of colour options. Anodising provides extra protection in high salt areas.
- Suits doors up to 40mm thick including CS DoorLeaves.
- Pelmet and end caps are removable for future servicing requirements.
- Maximum door weight: 240kg using M8 (4-wheel) carriages.
- Pre-drilled fixing holes for quick, easy installation.

Technical Information

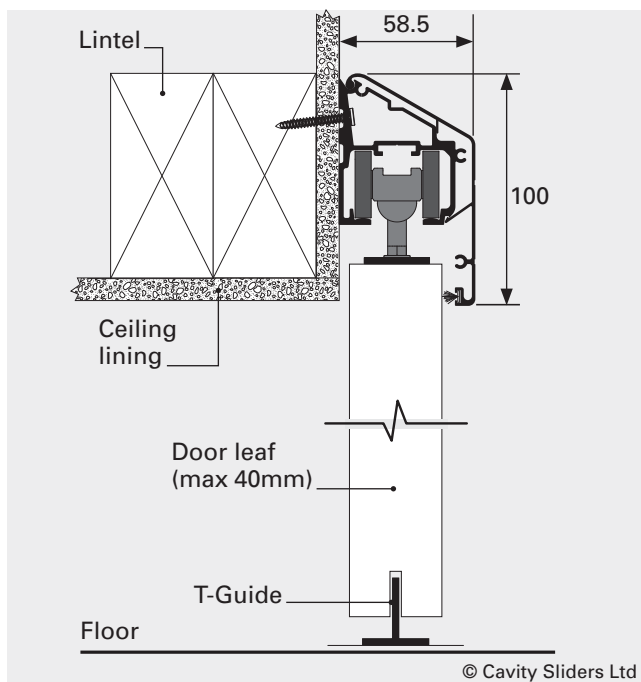


© Cavity Sliders Ltd

Max Door Thickness:	40mm
Track Finish:	Natural anodised
Pelmet Finish:	Natural anodised. May be P/C†
Max Door Weight:	Standard: 240kg SofStop: 100kg
Section Height:	100mm
Section Width:	58.5mm
Brush Seals Available:	Yes - one side of door only
Carriage Pack:	M6/M8/SofStop

Options

Configurations

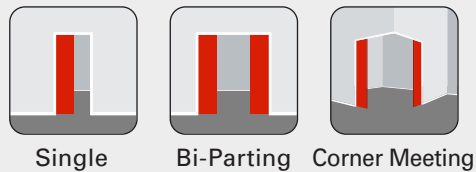

Operation



Pack Components

- Track and pelmet - cut to specified length
- Single, Bi-Parting or SofStop carriage pack
- All required T-Guides and track stops
- End caps and wall fixing screw sets



© Cavity Sliders Ltd

†Special powder coat, paint or anodised finishes must be requested at time of order. Additional charges and lead time apply. Drawings are not to scale. All dimensions in mm.