

# CavitySliders™ Wet Area Solutions

Cavity sliders are a practical space saving solution for bathrooms, en suites, laundry and other wet areas. All CS Cavity Sliders are suitable for installation into bathroom and internal wet areas if correct installation and waterproofing procedures are followed. There are some practical things to consider first:

- ▮ H3.1 treated jambs nogs and skirting blocks can be requested (all options available from CS).
- ▮ Consider where plumbing needs to run - it cannot run in the pocket - a false wall beside the pocket may be required.
- ▮ If you are tiling, we can supply the cavity with ply on the side to be tiled.
- ▮ Tiling your pocket or running a false wall beside your cavity pocket will require a non-standard width jamb on one side which we can easily provide for you.



CS TimberFormed with custom joinery door

## Ply Panel Cavity Sliders in a Tiled Application

CS Cavity Sliders are suitable for tiling onto. Ensure correct installation procedure is followed and a suitable tile substrate is fixed to the cavity pocket. Care should be taken to ensure the cavity wall is correctly waterproofed.


CS Cavity Sliders have been tested to meet the requirements of AS 1720.1, 2010 and support a load of up to 50kg/m<sup>2</sup>. The cavity slider, tiles and wall linings must all be installed as per the manufacturer's instructions to be compliant. 9mm Villaboard® was used in testing.\*

Once set, the tiles will strengthen the wall of the cavity pocket so it is important to ensure that the jambs are well clear of the door (use the jamb spreader supplied) before tiling.

For especially heavy tiles or if the cavity pocket is to form part of the shower enclosure it is recommended that the cavity pocket is manufactured with a 17mm H3.1 sheet of plywood in the frame. Double lining the cavity pocket with suitable wall board and tile substrate will also provide additional protection.

In all cases it is critical to ensure that all clearances are checked prior to fixing of tiles.

\*Wall lining can be substituted to a different brand or weight so long as the manufacturer provides certification of its capability to support the required loading.

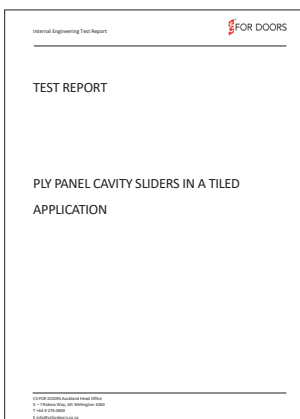

## Features

- ▮ Meets the requirements of AS 1720.1, 2010.
- ▮ H3 treated structural F11 ply to one side of pocket.
- ▮ H3 treated nogs, jambs and skirting blocks.
- ▮ Load tested up to 50kg per m<sup>2</sup>.
- ▮ Made to measure up to 3m x 3m.
- ▮ Can be specified with almost any choice of door including our **CS DoorLeaves** range.
- ▮ Add a privacy lock from the **CaviLock** range for a complete package.

Testing carried out in 2019 at Cavity Sliders Ltd. testing facility.

CS Cavity Sliders Pty. Ltd.  
T 02 9905 0588  
F 02 9905 7088

[www.cavitysliders.com.au](http://www.cavitysliders.com.au)  
[info@cavitysliders.com.au](mailto:info@cavitysliders.com.au)

PO Box 158  
Freshwater, NSW 2096

 **CavitySliders™**  
Innovative Door Solutions

© All copyright and other property in this document is reserved by Cavity Sliders Ltd. Details and specifications are subject to change without notice. Whilst all care is taken to ensure the accuracy of all information, no responsibility will be accepted for any errors or omissions. NZ Patent No. 533838; Aust Patent No. 2005202818. \*Conditions apply. 61376 - 01.2020