

These instructions are supplementary to the instructions you already have and should be read after you have read the Installation Instructions for the unit purchased.

RakingHead™

The following points must be taken into account during installation:

1 The hole in the wall.

Calculation of how big the hole in the wall framing should be:

Height = door leaf height + 110mm

Width = (door leaf width x 2) + 30mm


2 Installing your door

Refer to Instruction "Fit the door" on the main instruction set.

You may notice that the door rubs on the top of the T-guide, causing it to stop before fully closing. If so, you will need to trim the height of the T-guide down using a fine toothed saw. Take care to ensure the door is still guided by the T-guide when fully open and that the cut edge of the T-guide is sanded to ensure a smooth surface.

3 Removing the door leaf.

Access to the rear mount plate for door removal is via a removable section of pelmet. Begin by removing the head jamb from one side (if fitted), then take out the removable section of pelmet. Continue with the standard Installation Instructions to remove the door leaf.

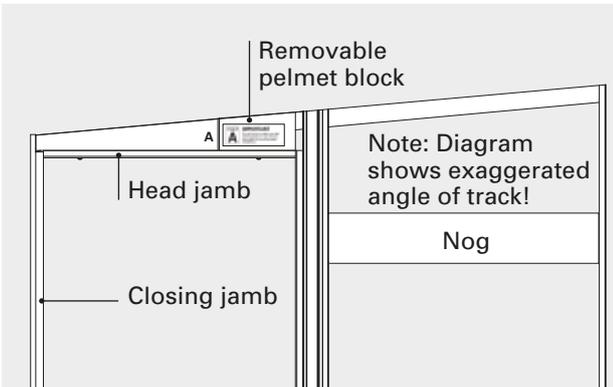

After installation but before lining, **clean the full length of the inside running surface of the track with a soft rag. TAPE UP THE TRACK to ensure no dust or debris enter the track or SofStop mechanism during building works.** Warranty does not cover damage arising from paint or debris in the track, wheels or mechanism.