






CS TimberFormed single unit with classical joinery door.



Single with glazed door.



Single with NewYorker door.



Single with NewYorker door.



Features

CS TimberFormed is the original cavity slider, first engineered in 1986. Our design principles were simple: "To create a high quality cavity slider that was reliable and ran very smoothly". In short, it's quite simply the leading cavity slider on the market.

- Manufactured to your specification.
- Designed to fit into standard 90mm wall framing.
- All aluminium components screwed together for strength and reliability.
- Special jamb timbers and profiles available on request.
- Available as Single or Bi-Parting double units, with or without door/s fitted.
- Maximum door weight: 240kg using M8 carriages.
- Supplied fully assembled, ready for on-site installation.
- Brush seals available on request.

Technical Information

Useful formulas ([online calculator on our website](#))

Dimension Required	Single	Bi-Parting
Trim height*	DH + 95	DH + 95
Trim width*	(DWx2) + 30	(DWx4) + 10
Distance between jambs*	DW - 31	(DWx2) - 42
Distance over jambs (Arch)	DW + 13	(DWx2) + 6
Distance over jambs (Grvd)	DW + 31	(DWx2) + 20
Floor to top of head (Arch)	DH + 38	DH + 38
Floor to top of head (Grvd)	DH + 49	DH + 49
Floor to underside of head*	DH + 18.5	DH + 18.5

All dimensions in millimetres. DH=Door Height, DW=Door Width
 * = Same calculations for Architrave (Arch) & Grooved (Grvd) jambs

How to specify (example)

Product:	~ CS TimberFormed by CS Cavity Sliders
Location:	~ Lounge/Dining
Door leaf dimensions:	~ 2400mm x 1200mm
Door type:	~ 38mm joinery door
Door finish:	~ Paint Quality
Single or Bi-Parting:	~ Single
Jamb type & finish:	~ Pine flat (for architraves)
Framing material & size:	~ 90mm timber framing
Wall lining thickness:	~ 10mm
Door gear type:	~ CS 100kg SofStop®
Handle type:	~ CaviLock CL400 Passage


Full specifications: www.masterspec.co.nz or www.natspec.com.au

Drawings are not to scale. All dimensions in mm.




Options

Incorporate any of the architectural detail options below with the CS TimberFormed cavity slider to create a specific look or to provide a unique solution to your design requirements.

Configurations

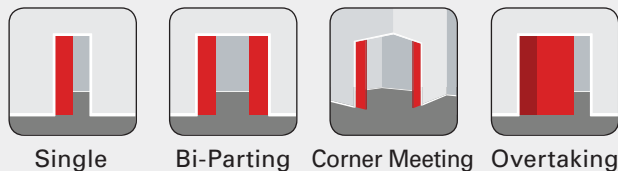

Jamb Options

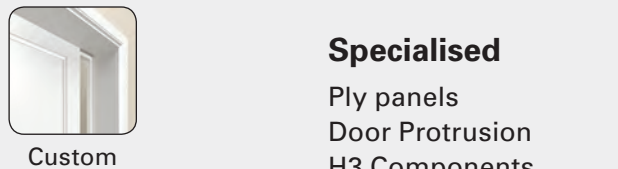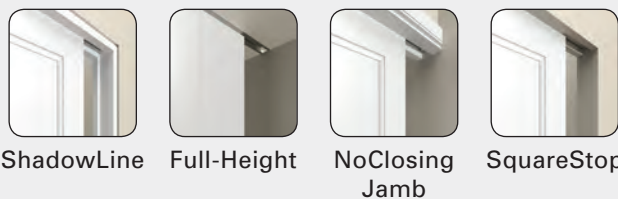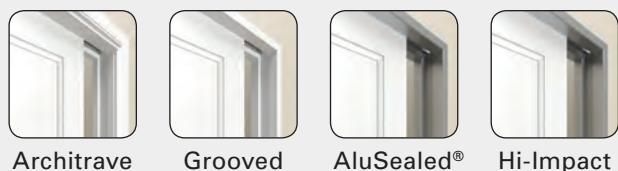

Specialised

Ply panels
 Door Protrusion
 H3 Components
 BraceWall®†

Operation



Suitable Door Types

Can be specified with almost any choice of door including our **CS DoorLeaves** range.

CS TimberFormed with 4-Lite CS NewYorker door

